


# SORA light

SORA light is a lightweight pigmented woodfree graphic paper with high opacity.

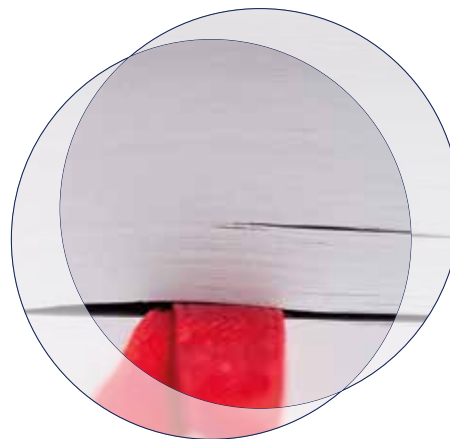

light

TS – 16. 07. 2019

	STANDARD	37	40	45	50	60	Tolerance
GRAMMAGE [g/m <sup>2</sup> ]	ISO 536	37	40	45	50	60	± 2
THICKNESS [μm]	ISO 534	43.5	47	53	59	71	± 4
SMOOT. BENDTSEN coated side [ml/min]	ISO 8791-2	100	100	100	100	100	± 40
RELATIVE HUMIDITY [%]	DIN 53118	47.5	47.5	47.5	47.5	47.5	± 7.5
D65 BRIGHTNESS [%]	ISO 2470 - 2 (D65/10°)	95	95	95	95	95	± 2
CIE WHITENESS [%]	ISO 11475 (D65/10°)	120	120	120	120	120	
OPACITY [%]	ISO 2471	77	80	85	88	93	± 2

Given values can be used as guide values only and can be changed without prior notice.  
For a valid specification, please refer to the one most recently published on the website [www.goricane.si](http://www.goricane.si).  
Information on the supplies of FSC® and PEFC certified products are available in the Sales department.



**ISEGA**

**GORIČANE**