


SORA matt+

Sora matt+ is a woodfree two—side matt coated high bulk graphic paper.

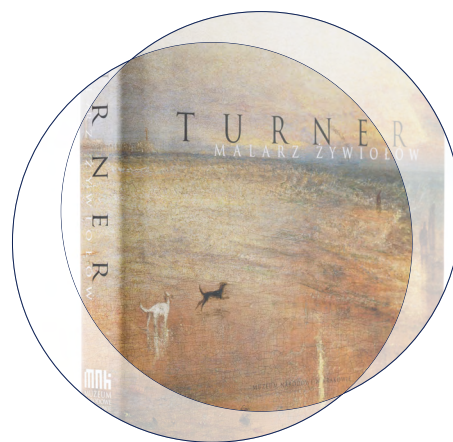

matt+

TS — 9. 4. 2021

| | STANDARD | 80 | 90 | 100 | 115 | 135 | Tolerance |
|--------------------------------------|------------------------|------|------|------|------|------|-----------|
| GRAMMAGE [g/m ²] | ISO 536 | 80 | 90 | 100 | 115 | 135 | ± 2 |
| SPEC. VOLUME [cm ³ /g] | ISO 534 | 1.15 | 1.15 | 1.18 | 1.20 | 1.25 | ± 0.05 |
| SMOOT. BENDTSEN [ml/min] | ISO 8791-2 | 150 | 150 | 200 | 200 | 200 | ± 90 |
| REL. HUMIDITY [%] | DIN 53118 | 47.5 | 47.5 | 47.5 | 47.5 | 47.5 | ± 7.5 |
| D65 BRIGHTNESS [%] | DIN 53118 | 97 | 97 | 97 | 97 | 97 | ± 2 |
| CIE WHITENESS [%] | ISO 11475 (D65/10°) | 124 | 124 | 124 | 124 | 124 | |
| OPACITY [%] | ISO 2471 | 92 | 94 | 95 | 97 | 98 | ± 2 |


Given values can be used as guide values only and can be changed without prior notice.
For a valid specification, please refer to the one most recently published on the website www.goricane.si.
Information on the supplies of FSC® and PEFC™ certified products are available in the Sales department.



GORIČANE

SORA matt 1.1

Sora matt 1.1 is a woodfree two—side matt-coated bulky graphic paper.

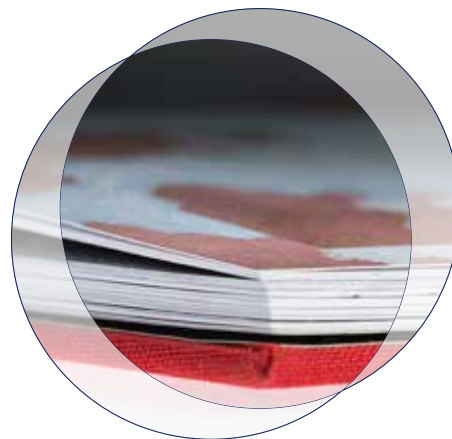

matt 1. 1

TS — 9. 4. 2021

| | STANDARD | 60 | 65 | 70 | 80 | 90 | 100 | 115 | 135 | Tolerance |
|--------------------------------------|------------------------|------|------|------|------|------|------|------|------|-----------|
| GRAMMAGE [g/m ²] | ISO 536 | 60 | 65 | 70 | 80 | 90 | 100 | 115 | 135 | ± 2 |
| SPEC. VOLUME [cm ³ /g] | ISO 534 | 1.05 | 1.06 | 1.06 | 1.07 | 1.08 | 1.1 | 1.12 | 1.14 | ± 0.04 |
| SMOOT. BENDTSEN [ml/min] | ISO 8791-2 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | ± 35 |
| REL. HUMIDITY [%] | DIN 53118 | 47.5 | 47.5 | 47.5 | 47.5 | 47.5 | 47.5 | 47.5 | 47.5 | ± 7.5 |
| D65 BRIGHTNESS [%] | DIN 53118 | 97 | 97 | 97 | 97 | 97 | 97 | 97 | 97 | ± 2 |
| CIE WHITENESS [%] | ISO 11475 (D65/10°) | 124 | 124 | 124 | 124 | 124 | 124 | 124 | 124 | |
| OPACITY [%] | ISO 2471 | 89 | 91 | 93 | 95 | 96 | 97 | 98 | 99 | ± 2 |

Given values can be used as guide values only and can be changed without prior notice.
For a valid specification, please refer to the one most recently published on the website www.goricane.si.
Information on the supplies of FSC® and PEFC™ certified products are available in the Sales department.



ISEGA

GORIČANE